



Wood Care Oil

with Borchi® OXY-Coat 1310 High-Performance Catalyst



New MEKO Regulation in the EU effective March 1st, 2022

Classified as 1b carcinogen with GHS labeling required at ≥ 0.1% MEKO content

Borchi® OXY-Coat 1310 Formulation:

Low VOC

• Co & Mn Free

Oxime-Free

More Durable




Wood Care Oil		
Material	Control Formulation	Borchi® OXY-Coat 1310 Formulation
WorleeKyd RL 1290	100.00	100.00
8% Manganese Drier	3.00	0.00
Borchi® OXY-Coat 1310	0.00	3.00
Total	103.00	103.00

If necessary, an anti-skinning additive such as MEKO-free Ascinin® Anti-Skin 0444 or Ascinin® Anti-Skin 1240 can be added.

Dry Time

Standard Conditions (23°C / 50% R.H.)

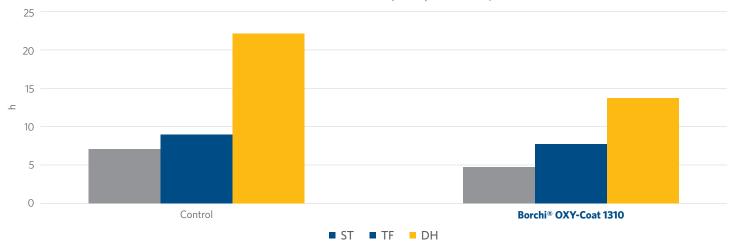

ST - Set to Touch: the paint starts to dry

TF - Tack-Free: the paint is ruptured by the ball

DH - Dry Hard: the paint is no longer marked by the ball





Wood Care Oil

with Borchi® OXY-Coat 1310 High-Performance Catalyst



No Wrinkling

with Borchi® OXY-Coat 1310



Control

Borchi® OXY-Coat 1310

Better Storage Stability Performance

no gel particles, no skin - after 2 weeks at 40°C in the oven





Control

Borchi® OXY-Coat 1310

Chemical Resistance

for 2 hours





Control

Borchi® OXY-Coat 1310

Lower Gardner Color Number







Borchi® OXY-Coat 1310



For more information, please reach us at borchers.com/contact

PLEASE NOTE: As each customer's use of our product may be different, information we provide, including without limitation, recommendations, test results, samples, care/labeling/processing instructions or marketing advice, is provided in good faith but without warranty and without accepting any responsibility/liability. Each customer must test and be responsible for its own specific use, further processing, labeling, marketing, etc. All sales are exclusively subject to our standard terms of sale posted at www.miliken.com/terms (all additional/different terms are rejected) unless explicitly agreed otherwise in a signed writing. Borchi is a trademark of Borchers Americas.

